Work Orde		190		*99190*									Page 1
Item ID: Revision ID: Item Name:	D3997-25		A	Accept		*N900	040	100	<b>)*</b> s	etup S	Start Stop	*N.	S1* S2*
	3/22/13 3/27/13	Start Qty: 10.00 Req'd Qty: 10.00	*10* *10*		• •	Cust Item Customer:							12
Approvals:	Process Pla	an: _ <i>MU</i> 5	Date: 13-04-02	Tooling:		D	ate:	_	R	un S	Start	*NI	₹1*
	QC:		Date:	SPC (Y/			ate:			\$	Stop	*NI	₹2*
Sequence ID/ Work Center II	)	Operation Description		Set U Run I		Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty		Reject Number	Insp. Stamp
Draw Nbr	Rev	vision Nbr				,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,							
D3997	A												
100		·		0.00									
*100* Purchasing		Memo		0.00				•	_cZ	13	10 c	1/03	_/_0
Purchasing		Manufacture Possible Sup	e as per Dwg D3997 pplier:Studio Lettrage ease note required										
110		Receive & Inspect for Da	amage & Mat'l Certs	0.00									
*110*				0.00					lox				80
Packaging Packaging		Memo		0.00	·					٠		)	3-11-6
120 *120*		QC6- Inspect dimension	s to drawing	0.00	27	0.			h				
QC Quality Control		Memo		0.00	13.4	5							

NCR:	⁄es	/ No				WORK ORDER NON-	COI	NFOR	MANCE / UPDATE		OA Classed	Data	-
											QA Closed:	Date:	
Work Orde	er:					DISPOSITION			AGAINS	ST DE	PARTMENT/	PROCESS	
	•					Rework			Skid-tube Crosstub	oe .		Water Jet 🗌	Engineering
Part N	lo.					Scrap	]	1	Machining Small Fa	<u> </u>	4	d. Eng. Coor.	Quality
						Use-as-is		ł.	noforming Finishir	~ <del> </del>	Rec/Stor	e/Packaging	Other
NCR N	۰.۰۱					Work Order Update			Large Fab Composi	te	]	Supplier	
Root					Descri	ption of work order update		Initial	Action		Sign &		
Cause		Date	Step	Qty	(	or Non-conformance	Ch	nief Eng	Description		Date	Verification	QC Inspector
Doc/Data													
Equip/Tooling													
Operator													
Material													
Setup						•	1						
Other	$\Box$		l										
Process					·								
Supplier	$\dashv$												
Training	Н						1						
Unapproved			l	<u> </u>	<u> </u>	F	AUI	LT CATE	I GORY				<u> </u>
Landi	ng G	Gear	·			General							
		Bending				Bend		Grain			Ovalized		Pressure/Forced
		Centre No	ot Concer	ntric to	o/s	BOM/Route		Hardwa	ire .		Over/Under	tolerance	Temperature/Cure
		Cracks				Broken/Damaged		Inspect	ion Incomplete		Part Incorred	ct	Weld
		Crushed/	Crimped.			Burrs		Instruct	ions Incomplete/Unclear		Part Lost/Mi	ssing	Wrong Stock Pulled
		Cuffs				Contamination		Mainte	enance		Part Moved		
,		Heat Trea	it			Countersink		Mislabe	eled		Positioned V	Vrong	
		Inspection	n Strip in	Tube		Cut Too Short		Misread	Ė	L	Power Loss/	Surge	Other
		Ripples in	Bend			Drill Holes	L	Offset					
		Torque W	aves in E	xtrusio	n 🗌	Drawing		Out of 0	Calibration				

Out of Sequence

Outside Dimensions

Date:

DQA:

Turning Sequence

Wave/Twist in Tube

Finish

Folio

H:/FORMS/Quality Assurance\approved QA/NCRWO Rev G

<u>. 4</u>					*** <u>******************************</u>							
Work Ord March-28-13		190			*991	-		,	Page 2			
Item ID: Revision ID: Item Name:	D3997-25 Placard				Accept	*N900	<b>040</b>	100	)* :	Setup Sta	IVI	S1* S2*
Start Date: Required Date Reference:	3/22/13 e: 3/27/13	Start Qty: 10.00 Req'd Qty: 10.00	·	*10* *10*		Cust Item I Customer:	D:					
Approvals:	Process Pla	an:	Date:_ Date:_		Tooling: SPC (Y/N):		ate:		I	Run Sta Sto	1/1	R1* R2*
Sequence ID/ Work Center	ID	Operation Description Identify as per dwg & Sto	ock Locatio	on: 5724	Set Up/ Run Hours 0.00	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
*130* Packaging		Memo			0.00				/OX			$\mathcal{A}$

140

Packaging

QC21- Final Inspection - Work Order Release

0.00

\*14**0**\*

Memo

0.00

Quality Control

NCR: Y	es / No				WORK ORDER NON-C	CONF	ORN	MANCE / UP		QA Closed:	Date	:
		<u></u>	· · · · · · · · · · · · · · · · · · ·		DISPOSITION			ASSA :	AGAINST DE			
Work Orde Part N	-				Rework Scrap	]		Skid-tube Machining	Crosstube Small Fab	Pro	Water Jet d. Eng. Coor.	Engineering Quality
NCR N					Use-as-is Work Order Update	]   T	herm	noforming Large Fab	Finishing Composite		re/Packaging Supplier	Other
Root		<u> </u>		Descri	ption of work order update	Initi	ial	Ac	tion	Sign &		
Cause	Date	Step	Qty	(	or Non-conformance	Chief	Eng	Desc	ription	Date	Verification	QC Inspector
Doc/Data												
Equip/Tooling Operator	$\dashv$											
Material	-											
Setup	_											
Other												
Process			.									
Supplier		İ										
Training												
Unapproved												
					F	AULT C	ATE	GORY		7.1111		
Landin	ng Gear				General					7	<b>-</b>	<b>-</b>
	Bending				Bend	Gr	ain			Ovalized	_	Pressure/Forced
	Centre No	ot Concer	ntric to C	D/S	BOM/Route	<b></b>	ırdwa			Over/Under	<b> </b>	Temperature/Cure
	Cracks				Broken/Damaged	_	•	on Incomplete	ļ	Part Incorre	_	Weld
	Crushed/	Crimped.			Burrs	<del></del>		ions Incomplete	/Unclear	Part Lost/M	ssing	Wrong Stock Pulled
	Cuffs				Contamination	<b></b>		enance	<u> </u>	Part Moved		
1	Heat Trea				Countersink	$\vdash$	islabe			Positioned V		٦٠٠٠
}	Inspectio		Tube		Cut Too Short	$\vdash$	isreac	t		Power Loss/	Surge	Other
1	Ripples in			<u> </u>	Drill Holes	<b>-</b>	fset	- til				
	Torque W			י	Drawing	<del></del>		Calibration				
	Turning S	equence			Finish	LJOI	at of S	Sequence				

Outside Dimensions

DQA: \_\_\_\_\_ Date: \_\_\_\_

Wave/Twist in Tube

Folio

H:/FORMS/Quality Assurance\approved QA/NCRWO Rev G

Picklist Print

March-28-13 12:55:54 PM

Work Order ID:

99190

Parent Item:

D3997-25

Parent Item Name:

Placard

**Start Date:** 3/22/13

Required Date: 3/27/13

Page 1

Start Qty: 10.00

Required Qty: 10.00

Comments:

IPP rev A 10.01.12 new issue Prelim EC verified by:DD

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D3997-25P		Purchased	No				Each	0.0000		10	· · · · · · · · · · · · · · · · · · ·		•


Placard

10x 8P13-4-81

.

								DQA:	Date	:
NCR: Y	es / No			WORK ORDER NON-	CONFO	RMANCE / UP	DATE	QA Closed:	Date	· · · · · · · · · · · · · · · · · · ·
	· · · · · · · · · · · · · · · · · · ·		· · · · · · · · · · · · · · · · · · ·	 DISPOSITION			AGAINST DE	ner are the large of a constitution of the		
Work Orde Part N				 Rework Scrap Use-as-is	The	Skid-tube Machining ermoforming	Crosstube Small Fab Finishing	_	Water Jet d. Eng. Coor. e/Packaging	Engineering Quality Other
NCR N	0		<u></u>	 Work Order Update		Large Fab	Composite	] '	Supplier	
Root Cause	Date	Step	Qty	ption of work order update or Non-conformance	Initia Chief E	1 .	ction cription	Sign & Date	Verification	QC Inspector
Ooc/Data quip/Tooling Operator Material Setup Other Process Supplier Training Unapproved				·						
. , .				 	AULT CA	TEGORY			701	·
Landin	Bending Centre No Cracks Crushed/ Cuffs Heat Trea Inspectio Ripples in Torque W Turning S	Crimped at n Strip in n Bend Vaves in E	Tube	General Bend BOM/Route Broken/Damaged Burrs Contamination Countersink Cut Too Short Drill Holes Drawing Finish	Inspi Instr Mai Misl Misr Offsi	lware ection Incomplete uctions Incomplete, ntenance abeled ead	/Unclear	Ovalized Over/Under Part Incorre Part Lost/M Part Moved Positioned V Power Loss/	ct issing Vrong	Pressure/Forced Temperature/Cure Weld Wrong Stock Pulled Other
	Wave/Tw	ist in Tul	oe	Folio	Outs	ide Dimensions				

H:/FORMS/Quality Assurance\approved QA/NCRWO Rev G

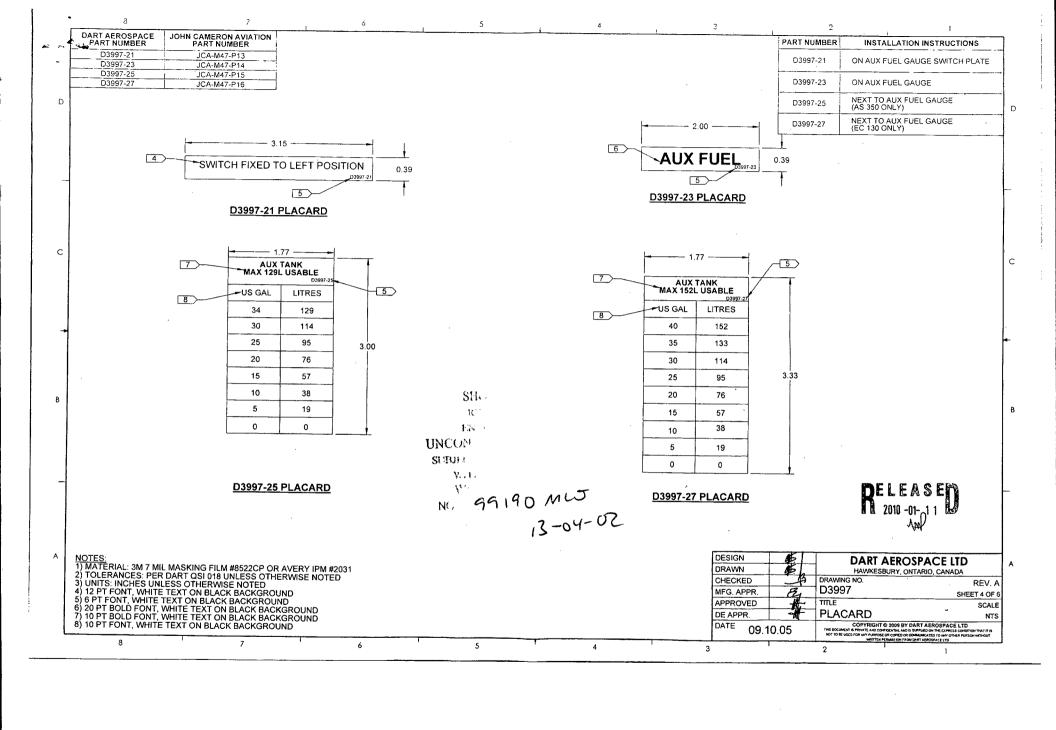

Studio de Lettrage 210 Main Street W Hawkesbury, Ontario K6A 2H6

part Aerospace Ltd

Hawkesbury, Ontario K6A 1K7

1270 Aberdeen

#### **INVOICE**

Invoice No.:

19822

Date:

04/05/2013

Ship Date:

Page:

1

Re: Order No.

WO9626

Sold to:

Ship to:

Dart Aerospace Ltd

Hawkesbury, Ontario

Business No.:	82500 7651 RT0	Quantity /		Tax		
Item No.	Unit	Quantity /	Description	X	Unit Price	Amount
		10	STICKERESID 3997-19P REPRINT STICKERS ID 3997-25P REPRINT PO#19479	H	8.00 8.00	80.0 80.0
			PO#19479	''	0.00	60.0
			H - HST 13%			
			HST			20.8
			•		. 1	
				·  _	13-4-8	( '
				$\downarrow \cap$	110-4	)
			7	1V	1	
				1		
		. January Company	and the same of th		en e	
	,					
	<b>,</b>					
Studio de Lettrage	  -  HST: #825007651R	T0001				
Shipped By:	Tracking N					
Comment:					Total Amount	180.
Jonation.						
Sold By:						

****Certificate o	f Conformity****	
Customer:		
Studio Lettra	XE	
Purchase Order #: Packing Slip #:	Part #: Serial	#:
Description: D-3997-199- D-3997-250	Quantity:  XID  XID	
Certification:		
We hereby certify that:		
The above the listed items were manufacted accordance with applicable drawings and/or accordance with applicable drawings.		ed in
All work was accomplished in accordance     Purchase Order:	with the Dart Aerospace	
Results of all inspections, chemical or physical which shows the acceptability of raw mater components are on file and available for install.	ials, parts and/or assembly	idence,
·		
Authority:		
Sm		
APPROVAL: Karen St. MARIE	DATE:	
Signature: Layer Sto Mon-		
Title: Project Cooldingutur	April 5,2013	) .

## **3M**

#### **Product & Instruction Bulletin 8522**

Release I, Effective September 2008 See Bulletin Change Summary and end of Bulletin This Bulletin now includes Instruction Bulletin 4.23

## Scotchcal<sup>™</sup> Changeable Opaque Imaging Media

8522

#### **Product Description**

#### Recommended Types of Graphics and End Uses

#### For Thermal Inkjet Printing

This durable, 7 mil, opaque, changeable film is optimized for use with selected thermal inkjet printers and inks. Ink dries quickly on the film. When overlaminated, it is warranted for medium term, outdoor weatherable graphics, and long term indoor graphics.

When constructed and used as described in this Bulletin, these types of graphics and end uses may be warranted by the 3M ™ MCS ™ Warranty. Please read the entire Bulletin for details.

- First surface images (the image is on top of the film) for opaque posters and signs, including:
  - Graphics for vans, personal vehicles, trucks and buses
  - Novelty posters
  - Retail and point-of-purchase displays
  - Information graphics such as maps and directories
  - Entertainment promotions in museums, zoos, parks, theatres, sports venues
  - Education and presentation graphics
  - Legal and courtroom exhibits
- For flat or simple curved surfaces, with or without rivets, used in vertical (± 10°)
  applications

#### **Limitations of End Uses**

3M specifically does not recommend or warrant the following uses, but please contact us to discuss your needs or recommend other products.

### Unsuitable End Uses for This Product

- · Not for electronically cut individual letters and numbers
- · Fleet applications in areas that use salt for winter road maintenance
- Application to non-warranted substrates, including wallboard
- · Applications subjected to gasoline vapors or spills
- Application to corrugated or highly irregular surfaces or sharply raised areas
- · Graphics applied to stainless steel, including stainless steel vehicles
- On flat surfaces with rivets, tenting of 4 to 10 mm around rivets may be expected; rivets may be cut around to eliminate tenting.
- Graphics made for automotive Original Equipment Manufacturers (OEM); contact 3M Automotive Division at 1-800-328-1684 for alternatives.

About Water-Based Inkjet Technology

Standard inkjet technology is water based. Water-based chemistry is susceptible to the extremes of heat and humidity. This is a factor in most product constructions on the market. Read the Fabrication, Shelf Life and Storage sections in this Bulletin. Staying in the middle of these ranges always provides optimum performance.

#### **Compatible Products**

#### **3M Graphic Materials**

For complete details about graphic construction options, recommended uses and durability, refer to the Product Bulletin for the base film or substrate (media) you are using. See **3M Related Literature** at the end of this Bulletin.

This Bulletin provides details about the base film and construction options and warranty. Additional specific information about compatible products can be found in the Product and Instruction Bulletins listed in **3M Related Literature** at the end of this bulletin.

#### **3M Graphic Materials**

For complete details about graphic construction options, recommended uses and durability, refer to the Product Bulletin for the base film or substrate (media) you are using. See **3M Related Literature** at the end of this Bulletin.

#### Film

3M™ Scotchcal™ Opaque Imaging Media 8522

#### Overlaminate

- 3M™ Scotchcal™ Luster Overlaminate 8519
- 3M™ Scotchcal™ Matte Overlaminate 8520

#### **Printers and Inks**

HP Designjet Printers	HP Inks
<ul> <li>2500CP and 2000CP</li> <li>2800CP and 3800CP</li> <li>3500CP and 3000CP</li> <li>HP Designjet 5000 and 5500</li> </ul>	<ul> <li>Designjet CP Ink System UV (pigment-based)</li> <li>Designjet CP Inkjet System (imaging ink)</li> </ul>
• Z6100	HP 91 Vivera Ink System

Epson Printers	Epson Inks
Stylus Pro 9500	Archival Inks
<ul> <li>Stylus Pro 10000 printer</li> </ul>	
Stylus Pro 10600 printer	

#### **Characteristics**

These are typical values for unprocessed product; processing may change the values. Contact your 3M representative for a custom specification.

Characteristic	Description
Media	7 mil, white, opaque graphic film
Liner	Low-slippage, lay flat paper
Adhesive	Changeable, pressure sensitive
Thickness	Media with adhesive: 7.5 to 8 mil (nominal)
Warranted application substrates	See next page.
Application surfaces	Flat or simple curved surfaces, with or without rivets, used in vertical (± 10°) applications (no corrugations)
Application temperature range	28° to 110°F (-2° to 43°C) (air and surface)
Removable	For up to one year; see Warranty Information

Characteristic	Description
Warranted application substrates	Some substrates may "out-gas", resulting in tiny bubbles throughout the surface of the graphic. For maximum performance, be sure the substrate you select is properly cleaned and prepared as recommended by the manufacturer. See Instruction Bulletin 5.1 for additional information.
	Alodine (anodized aluminum)
	Automotive panels (automotive painted steel)
	Fruehauf (painted aluminum)
	FRP (fiberglass reinforced plywood)
	Glass
	Imron® (polyurethane-painted metal panel)
	Acrylic .
	Sintra ™ board
	Note: Use on any other substrate is strictly on a graphics manufacturer and customer test and approve basis. Test for both adhesion and removal characteristics. The plasticizer in some banner materials may migrate. This may cause the edge of the graphic to peel or lift off of the banner. For optimum performance, follow the guidelines in the section, Creating A Laminated Overlap, on page 4.

#### **Warranty Information**

The warranty given in the Product Bulletin that is current at the time you purchased the film is the one that 3M will honor. The warranties in the following table(s), given in years, are for finished graphics exposed in a vertical exposure in the United States except the Desert Southwest. See the warranty sections following this table for additional information.

## **3M<sup>™</sup> MCS<sup>™</sup> Warranty** Durability for Finished Graphics

Construction (film and overlaminate on warranted substrate	HP Printers & Inks		Epson Printers & Inks		Removal
	Outdoor	Indoor	Outdoor	Indoor	
8522/8519 8522/8520	3 years	5 years	2 years	5 years	1 year without chemical strippers or tools

#### Warranty and Limited Remedy

The following is made in lieu of all other express or implied warranties, including any implied warranty of **merchantability** or fitness for a particular purpose or implied warranty arising out of a course of dealing, custom or usage of trade: all 3M products are warranted to be free of defects in materials and manufacture at the time of shipment and to meet the specifications stated in this Product Bulletin. 3M will replace or refund the price of any 3M materials that do not meet this warranty within the specified time periods. These remedies are exclusive. In no case shall 3M be liable for any direct, indirect, or consequential damages, including any labor or non-3M materials charges.

See the Graphics Market Center Warranty Brochure, which gives the terms, additional limitations of the warranty, if any, and limitations of liability.

## **Graphic Construction Options**

#### **Opaque Graphics**

Opaque graphics made with imaging media 8522 require an overlaminate and an opaque substrate.

# Overlaminate 8519, 8520 Adhesive on bottom Imaging Media 8522 Image on top; adhesive on bottom Opaque Substrate

#### **Fabrication**

Different combinations of shop temperature and humidity can affect the handling of the media, the protective finish and the printed graphic. For optimum performance, use the *middle* of each of these ranges whenever possible.

**Shop Temperature** 

Acceptable: 60° to 95°F (15° to 35°C)
Optimum: 65° to 73°F (18° to 23°C)

**Shop Humidity** 

Acceptable: 20% to 80% Optimum: 45% to 60%

Condition the Media Before Use

These steps are especially important if you are operating outside the conditions recommended under Fabrication, above.

- · Leave the media in its original packaging until you are ready to condition and use it.
- The day before you need it, remove the media from the box and remove the plastic.
- Condition the media for 24 hours in the same environment as the printer.

#### Printer Settings for Optimum Quality

Refer to your Hewlett Packard printer manual for detailed operating instructions.

The quality of a printed image depends on a combination of factors: correct media selection, printing software and raster imaging processor (RIP), shop conditions, etc.

The printers qualified to use this media have print mode options that are programmed specifically for these media. Current charts that show the various modes and printing dpi, and the quality results you can expect are available at www.hp.com under the website's support section. We recommend that you print the same image at all of these settings to determine acceptable print and productivity results.

The highest quality settings are usually desirable for backlit applications.

The correct media selection makes most other necessary adjustments to the printer.

- For the HP DesignJet CP 2000 or 3000 series printers, select the Opaque Vinyl UV setting.
- For the HP Designjet 5000 series printers, select the 3M Changeable UV setting or the HP Durable Gloss UV or HP Colorfast Vinyl setting.
- For the Z series printers, refer to HP's website or printer manuals.

Note: The HP printer settings lay down less ink per pass, which results in better ink absorption and quicker drying times.

- For the HP DesignJet CP 2000 or 3000 series printers, select the Opaque Vinyl UV setting.
- For the HP Designjet 5000 series printers, select the 3M Changeable UV setting or the HP Durable Gloss UV or HP Colorfast Vinyl setting.
- For the Z series printers, refer to HP's website or printer manuals.

Note: The HP printer settings lay down less ink per pass, which results in better ink absorption and quicker drying times.

#### **Drying Guidelines**

Usually, the media can be laminated within 10 minutes after printing. However, especially in high humidity conditions, we recommend waiting 15 to 30 minutes before laminating.


Use care when handling graphics that have not been laminated to avoid scratching and abrasion.

Graphics made with this media and ink combination typically may be wound directly on a take-up roll after printing.

Whether or not you want a warranted graphic, an overlaminate is recommended to enhance durability, especially in outdoor applications.

#### **Overlaminate**

FIGURE 1
Typical Laminator Thread-up



#### Creating a Laminated Overlap

Creating a laminated overlap helps ensure that the graphic does not peel or lift away from certain banner materials that may be subject to plasticizer migration. This method may also be used for flat, rigid or flexible sign applications.


- 1. Print the graphic as usual.
- 2. On all sides of the graphic, score *the film only* to the correct, final graphic dimension *without cutting through the liner*.

Weed away the excess film, leaving the bare liner exposed around the graphic. See FIGURE 2.

FIGURE 2 Trim and Weed Film Margin Only



Score Film Only



Weed Margin

3. Laminate the graphic as usual (see page 5), making sure that at least one inch of the bare liner is covered by the laminate. See FIGURE 3.



Dart Aerospace Ltd. 1270 Aberdeen Street Hawkesbury, ON K6A 1K7

Tel: 613 632 9577 Fax: 613 632 1053

#### **PURCHASE ORDER**

#### Purchase Order ID PO19479

Purchase Order Date 4/03/13 PO Print Date 4/03/13

Page Number 1 of 1

Order From:

STUDIO DE LETTRAGE 2001

210 MAIN WEST

HAWKESBURY, ON K6A 2H6

CA

Contact Name

Vendor Phone

613 632 5449

Vendor Fax

613 632 9491

Vendor Account Nbr

Buyer

Requisition Nbr

Tax Resale Nbr

**Terms** 

Currency

**FOB** 

Net 30 CAD

Destination-Collect

Chantal Lavoie

10127-2607

Ship To:

DART AEROSPACE LTD

1270 ABERDEEN

HAWKESBURY, ON K6A 1K7

VC-STU001

CANADA

Line Nbr Reference

Revision ID

Description/ Mfg ID

Req Date/ Taxable Unit of Measure

Req Qty/ Ship Method

**Unit Price** 

Extended Price

Vendor Part Number

D3997-19P

Placard

Placard

4/05/13

Yes

10.00

Each

Yours ppd

\$8.0000

\$80.00

D3997-25P

2

AS PER DWG D3997 REV.

B99091

4/05/13 Yes 10.00

Yours ppd

Each

\$8.0000

\$80.00

Special Inst:

Special last:

AS PER DWG D3997 REV. A

B99190

PO Total:

\$160.00

CERTIFICATE OF CONFORMITY REO'D UPON DELIVERY

3613-7-8

No substitution or deviation without consent.

Certificate of Conformity or Material Certification required -NO

Change Nbr:

Change Date: 4/03/13